


PLAN

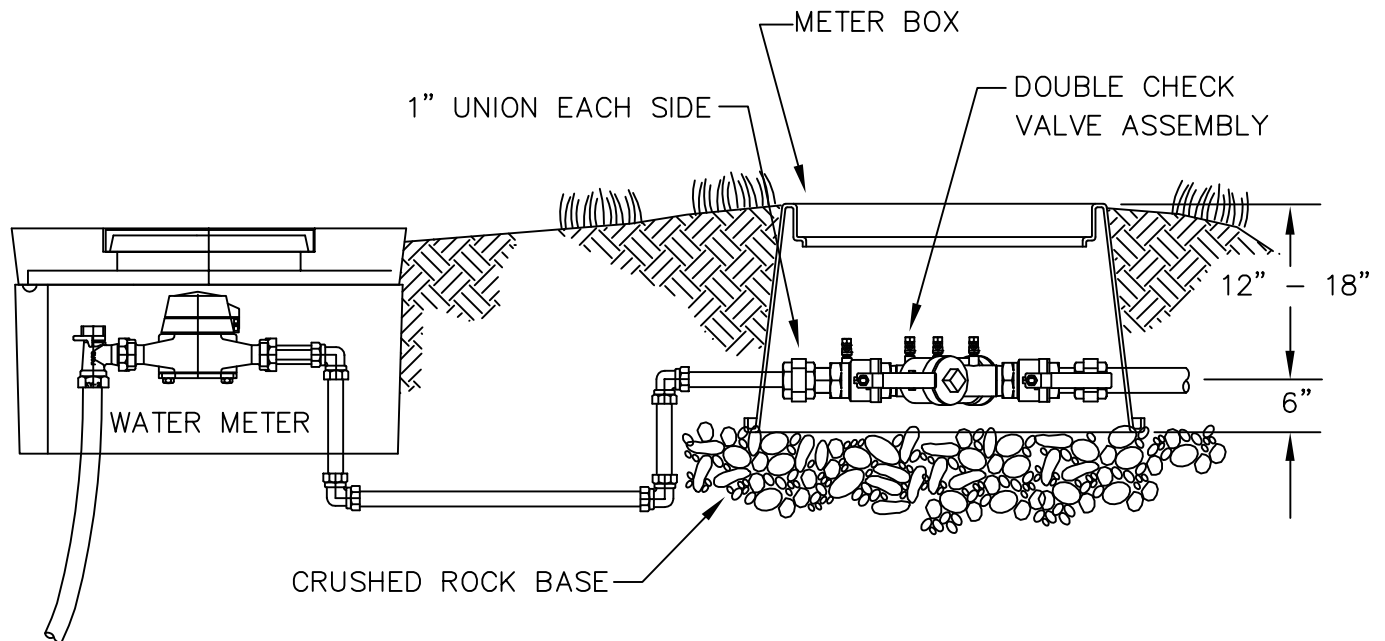

ELEVATION

BOX SPECIFICATIONS	
DEVICE SIZE	BOX TYPE
3/4" - 1"	BROOKS #1419 SERIES OR EQUAL
1 1/2" - 2"	CARSON 1730D P15L OR EQUAL

INSTALLATION SHOWN IS ONLY A SUGGESTION.

1. DOUBLE CHECK TO BE LOCATED DIRECTLY BEHIND WATER METER.
2. BRASS, STAINLESS, OR PLASTIC PLUGS TO BE INSTALLED IN TEST COCKS IF BELOW GROUND INSTALLATION.
3. DISTANCE FROM BOTTOM OF DEVICE TO FINISH GRADE, FREEZE PROTECTION, AND CLEARENCE FOR TESTING AND REPAIR ARE THE MAJOR CONSIDERATIONS FOR INSTALLATION.



ENGINEERING DEPARTMENT  
13125 S.W. HALL BLVD.  
TIGARD, OREGON 97223  
VOICE: (503) 639-4171  
FAX: (503) 684-7297

APPROVED BY:  
**AGUSTIN P. DUENAS**

CITY ENGINEER

**MARCH 1998**

APPROVAL DATE

**DOUBLE CHECK  
ASSEMBLY**

NO SCALE

DWG. NO.

**530**